


canopus 201

trim



DIMENSION

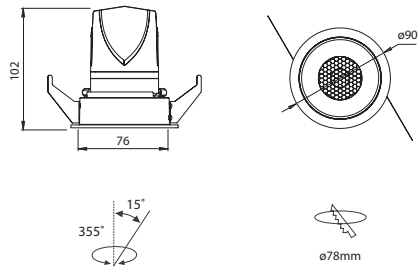

SYSTEM POWER

5W / 7W / 10W / 15W

BEAM ANGLE



COLOR TEMPERATURE

2700K / 3000K / 4000K

COLOR RENDERING INDEX


CRI>90 / CRI>95

SECONDARY REFLECTOR















ACCESSORIES

COB BRAND



LIGHT DISTRIBUTION

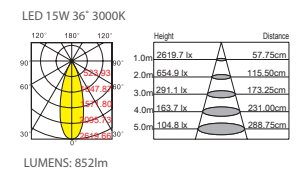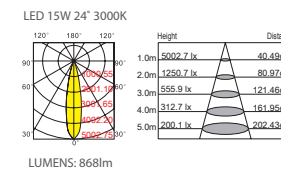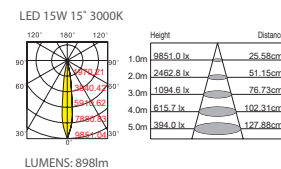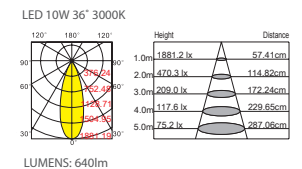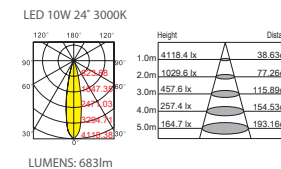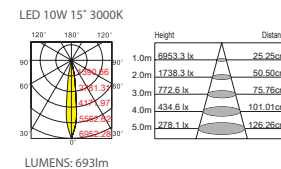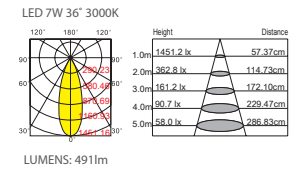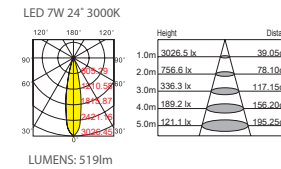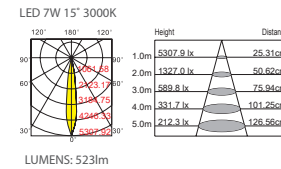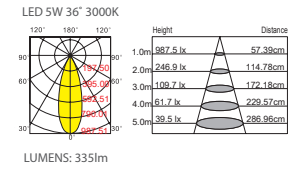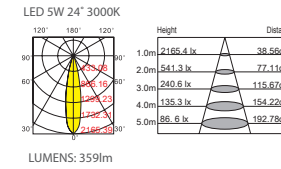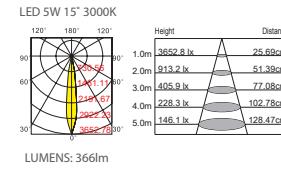

POWER SUPPLY

NO DIM
TRAIC DIM
1-10V DIM
DALI DIM

REFERENCE INFORMATION

Current 120mA / 180mA / 250mA / 350mA
Voltage 36V
IP Rate IP20

